

Customizable Fail-Safe multifunction technology actuator for controlling dampers in typical commercial HVAC applications.

- Actuating force motor 450 N [100 lbf]
- Nominal voltage AC/DC 24 V
- Control MFT/programmable
- Position feedback 2...10 V







AHKX24-MFT-100

5-year warranty





Technical data

actrical	ы	ata

Nominal voltage	AC/DC 24 V
Nominal voltage frequency	50/60 Hz
Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
Power consumption in operation	11 W
Power consumption in rest position	3 W
Transformer sizing	22 VA
Electrical Connection	18 GA appliance or plenum cables, 1 m, 3 m or 5 m, with or without 1/2" conduit connector
Overload Protection	electronic throughout full stroke
Electrical Protection	actuators are double insulated
Actuating force motor	450 N [100 lbf]
Operating range V	2 10 V

Functional data

Overload Protection	electronic throughout full stroke
Electrical Protection	actuators are double insulated
Actuating force motor	450 N [100 lbf]
Operating range Y	210 V
Operating range Y note	420 mA w/ ZG-R01 (500 Ω, 1/4 W resistor)
Input impedance	100 k Ω for 210 V (0.1 mA), 500 Ω for 420 mA, 1500 Ω for PWM, On/Off and Floating point
Operating range Y variable	Start point 0.530 V End point 2.532 V
Operating modes optional	variable (VDC, on/off, floating point)
Position feedback U	210 V
Position feedback U note	Max. 0.5 mA
Position feedback U variable	VDC variable
Setting Fail-Safe Position	adjustable with dial or tool 0100% in 10% increments
Bridging time (PF)	2 s
Bridging time (PF) variable	010 s
Pre-charging time	526 s
Direction of motion motor	selectable with switch 0/1
Direction of motion fail-safe	reversible with switch
Manual override	external push button
Stroke	4" [100 mm]
Running Time (Motor)	150 s / 100 mm
Running time motor variable	90150 s
Running time fail-safe	<35 s
Adaptation Setting Range	off (default)
Override control	MIN (minimum position) = 0% MID (intermediate position) = 50% MAX (maximum position) = 100%
Noise level, motor	52 dB(A)
Noise level, fail-safe	61 dB(A)



Technical data sheet AHKX24-MFT-100

Safety data

Power source UL	Class 2 Supply		
Degree of protection IEC/EN	IP54		
Degree of protection NEMA/UL	NEMA 2		
Enclosure	UL Enclosure Type 2		
Agency Listing	cULus acc. to UL60730-1A/-2-14, CAN/CSA E60730-1:02, CE acc. to 2014/30/EU		
Quality Standard	ISO 9001		
UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC		
Ambient humidity	Max. 95% RH, non-condensing		
Ambient temperature	-22122°F [-3050°C]		
Storage temperature	-40176°F [-4080°C]		
Servicing	maintenance-free		
Weight	3.3 lb [1.5 kg]		
Housing material	UL94-5VA		

Footnotes

Weight

Materials

†Rated Impulse Voltage 800V, Type of action 1.AA, Control Pollution Degree 3

Product features

Default/Configuration

Default parameters for 2 to 10 VDC applications of the AHK..-MFT actuator are assigned during manufacturing. If required, custom versions of the actuator can be ordered. The parameters are variable and can be changed by three means: Factory pre-set or custom configuration, set by the customer using PC-Tool software or the handheld ZTH US.

Application

For fail-safe, modulating control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications. A feedback signal is provided for position indication.

Operation

The AHKX24-MFT-100 provides a 4 inch linear stroke. The stroke of the gear rack can be adjusted on both sides in increments of 0.8 inches [20mm] with the mechanical end stops. When reaching the damper or actuator end position the actuator automatically stops. The gear can be manually disengaged by pressing the button located on the actuator cover. The AHKX24-MFT actuator uses a brushless DC motor controlled by an Application Specific Integrated Circuit (ASIC). The ASIC monitors and controls the actuator rotation and provides a digital rotation sensing (DRS) function to prevent damage to the actuator in a stall condition. Power consumption is reduced in a holding mode. The actuator is electronically protected against overload. The anti-rotation strap supplied with the actuator will prevent lateral movement.

Fail-Safe Indication

LED status indicator lights sequence:

Yellow off / Green on: operation ok, no faults

Yellow off / Green blinking: fail-safe mechanism is active

Yellow on / Green off: fault is detected

Yellow off / Green off: not in operation / capacitors charging

Yellow on / Green on: adaption running

Yellow blinking / Green on: communication with programming tool

^{*}Variable when configured with MFT options.

Technical data sheet

Typical specification

Modulating control, electrical fail-safe damper actuators shall be electronic type with integrated linear stroking arm. Actuators must provide modulating control in response to a control input from an electronic controller or positioner. Actuators shall have brushless DC motor technology and be protected from overload at all angles of rotation. Actuators shall have reversing switch and manual override on the cover. Run time shall be constant and independent of torque. A 2 to 10 VDC feedback signal shall be provided for position feedback. Actuators shall be cULus listed, have a 5-year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

Bridging time

Power failures can be bridged up to a maximum of 10 s.

In the event of a power failure, the actuator will remain stationary in accordance with the set bridging time. If the power failure is greater than the set bridging time, the actuator will move into the selected fail-safe position.

The bridging time set at the factory is 2 s. It can be modified on site in operation by means of the Belimo service tool MFT-P.

Settings: The rotary knob must not be set to the "PROG FAIL-SAFE" position!

For retroactive adjustments of the bridging time with the Belimo service tool MFT-P or with the ZTH EU adjustment and diagnostic device only the values need to be entered.

Factory settings

Default parameters for 2 to 10 VDC applications of the AHK..-MFT actuator are assigned during manufacturing. If required, custom versions of the actuator can be ordered. The parameters are variable and can be changed by three means: Factory pre-set or custom configuration, set by the customer using PC-Tool software or the handheld ZTH US.

Accessories

Electrical accessories	Description	Туре
	DC Voltage Input Rescaling Module	IRM-100
	Convert Pulse Width Modulated Signal to a 210 V Signal for Belimo	PTA-250
	Proportional Actuators	
	Positioner for wall mounting	SGA24
	Positioner for front-panel mounting	SGF24
	Cable conduit connector 1/2"	TF-CC US
	Gateway MP to BACnet MS/TP	UK24BAC
	Gateway MP to LonWorks	UK24LON
	Gateway MP to Modbus RTU	UK24MOD
	Resistor, 500 Ω , 1/4" wire resistor with 6" pigtail wires	ZG-R01
	Resistor kit, 50% voltage divider	ZG-R02
	Transformer, AC 120 V to AC 24 V, 40 VA	ZG-X40
	Battery backup system, for non-spring return models	NSV24 US
	Battery, 12 V, 1.2 Ah (two required)	NSV-BAT
Mechanical accessories	Description	Туре
	Ball joint suitable for damper crank arm KH8 / KH10, Multipack 10 pcs.	KG10A
	Ball joint suitable for damper crank arm KH8, Multipack 10 pcs.	KG6
	Ball joint suitable for damper crank arm KH8, Multipack 10 pcs.	KG8
	Push rod for KG6 & KG8 ball joints (36" L, 5/16" diameter).	SH8
	Rotary support, for linear actuator, for compensation of transverse forces	Z-DS1
	3/8"-16 shaft clevis for AHK/AH.	Z-KSC
	Bracket for AHK/AH/LH linear actuators.	ZG-119
Tools	Description	Туре
	Belimo PC-Tool, Software for adjustments and diagnostics	MFT-P
	Signal simulator, Power supply AC 120 V	PS-100
	Connecting cable 16 ft [5 m], A: RJ11 6/4 ZTH EU, B: 6-pin for connection to service socket	ZK1-GEN
	Connecting cable 16 ft [5 m], A: RJ11 6/4 ZTH EU, B: free wire end for connection to MP/PP terminal	ZK2-GEN
	Connecting cable 10 ft [3 m], A: RJ11 6/4 ZTH EU, B: 3-pin Weidmüller and supply connection	ZK4-GEN
	Service Tool, with ZIP-USB function, for programmable and communicative Belimo actuators, VAV controller and HVAC performance devices	ZTH US



Electrical installation

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

Meets cULus requirements without the need of an electrical ground connection.

(A) Actuators with appliance cables are numbered.

Provide overload protection and disconnect as required.

Actuators may also be powered by DC 24 V.


Only connect common to negative (-) leg of control circuits.

 Λ A 500 Ω resistor (ZG-R01) converts the 4...20 mA control signal to 2...10 V.

Control signal may be pulsed from either the Hot (Source) or Common (Sink) 24 V line. For triac sink the Common connection from the actuator must be connected to the Hot connection of the controller. Position feedback cannot be used with a triac sink controller; the actuator internal common reference is not compatible.


Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.


IN4004 or IN4007 diode. (IN4007 supplied, Belimo part number 40155).

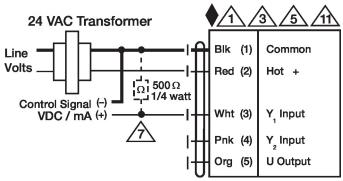


VDC/mA Control

Wiring diagrams

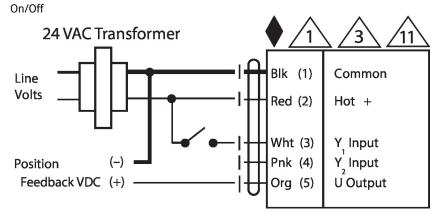

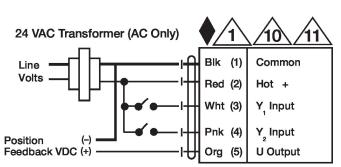


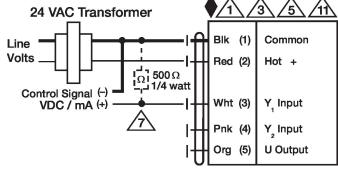

Floating Point

VDC/mA Control



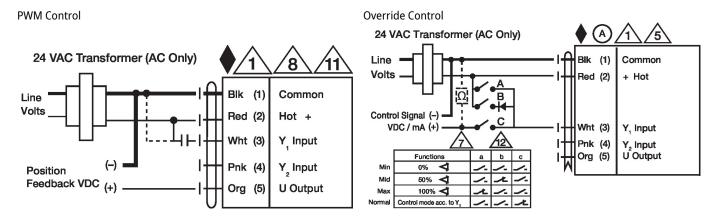

Dimensions

